

LAKER

Product Data Sheet —

Louvre Light in Walnut




DESCRIPTION

The Louvre Light is a solid walnut wall fixture defined by a louvred face that diffuses and softens the light. Mounted upward or downward, it casts a gentle wash across the wall with minimal glare—offering both warmth and subtle definition to a space.

Designed by David Caon & Henry Wilson, 2024.

LOUVRE LIGHT, TIMBER.
LKR-LVR-W



MATERIALS
PRODUCT WEIGHT
DIMENSIONS
LEAD TIME
LIGHT SOURCE
INPUT VOLTAGE
DIMMING
CERTIFICATION

ALUMINIUM
2.2 LBS / 1.0 KG
77W X 100D X 270H MM / 3.4"W X 3.9"D X 10.6"H
6-8 WEEKS
2X G9 LED / 3W EACH (INCLUDED, REPLACEABLE)
220-240 V / 110-120V
TRAILING-EDGE (ELV) WITH DIMMABLE G9
UL, ETL, RCM, CE COMPLIANT COMPONENTS

NOTES


- Hardwired installation only. Licensed electrician required.
- Fixture may be mounted upward or downward.
- Aluminium is rumble-polished and left raw; tone and markings vary.
- Only use LED G9 lamps; halogen not suitable due to heat.
- Replacement G9 lamps are available from Laker.

FINISHES




AMERICAN
WALNUT


TOP VIEW

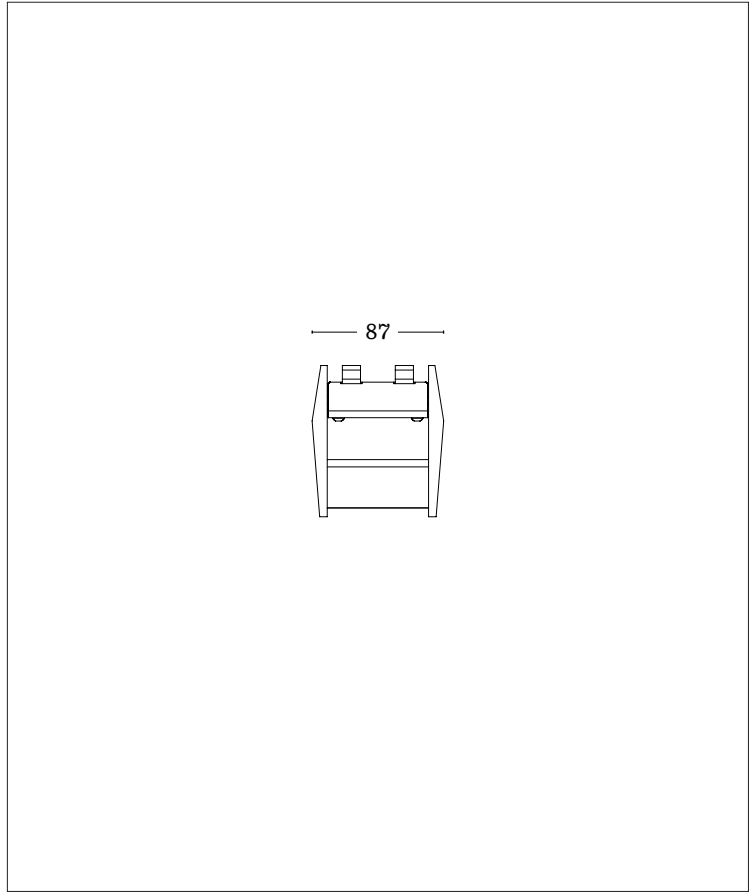


ISOMETRIC VIEW

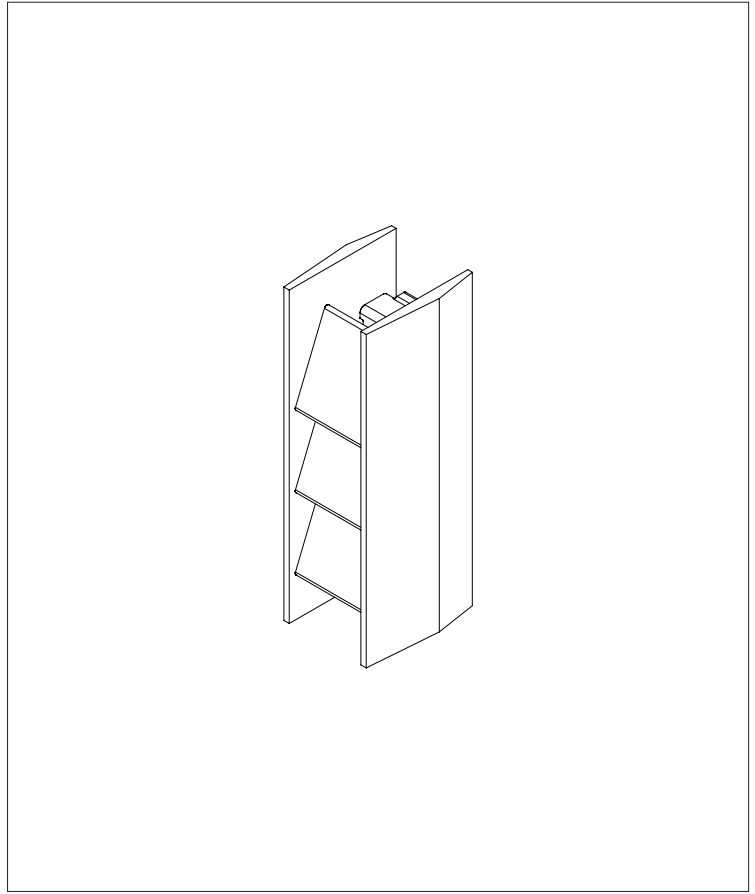

FRONT VIEW

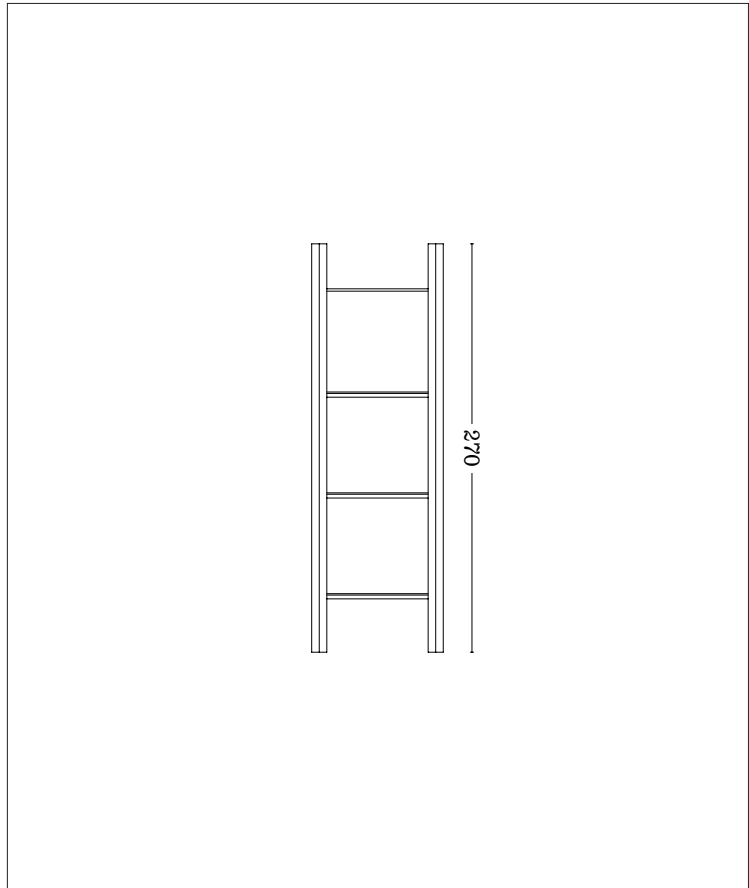

SIDE VIEW



LAKER

Product Data Sheet —

Louvre Light in Aluminium



DESCRIPTION

Cut from aluminium plate and rumble polished, the Louvre Light in aluminium introduces a raw material presence to the series. The louvred face softens and diffuses light across the wall, while the construction highlights exposed precision and the clarity of industrial making. An alternative to the walnut edition, it offers a sharper, more elemental expression of the design.
Designed by David Caon & Henry Wilson, 2025.

LOUVRE LIGHT, ALUMINIUM.
LKR-LVR-A



MATERIALS
PRODUCT WEIGHT
DIMENSIONS
LEAD TIME
LIGHT SOURCE
INPUT VOLTAGE
DIMMING
CERTIFICATION

ALUMINIUM
2.2 LBS / 1.0 KG
77W X 100D X 270H MM / 3.4"W X 3.9"D X 10.6"H
6-8 WEEKS
2X G9 LED / 3W EACH (INCLUDED, REPLACEABLE)
220-240 V / 110-120V
TRAILING-EDGE (ELV) WITH DIMMABLE G9
UL, ETL, RCM, CE COMPLIANT COMPONENTS

NOTES


- Hardwired installation only. Licensed electrician required.
- Fixture may be mounted upward or downward.
- Aluminium is rumble-polished and left raw; tone and markings vary.
- Only use LED G9 lamps; halogen not suitable due to heat.
- Replacement G9 lamps are available from Laker.

FINISHES




ALUMINIUM


TOP VIEW




ISOMETRIC VIEW

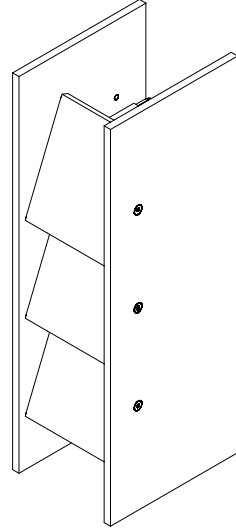

FRONT VIEW

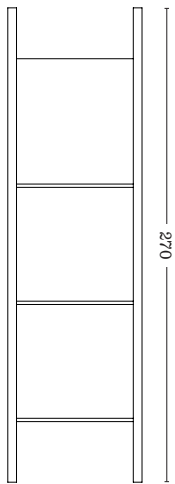

SIDE VIEW

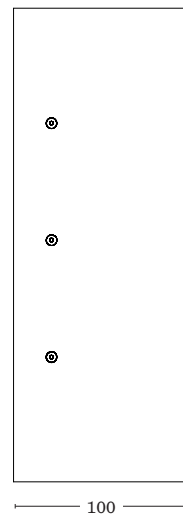

(E. info@laker.studio)
(P. (02) 9199 9658)
(A. 3/82 Myrtle Street, Chippendale NSW 2008)