



SOLACE

CHAIN PENDANT

Solace Chain extends the language of the Solace Pendant through a delicate suspension. A fine chain introduces movement and subtle weight, allowing the geometric glass form to settle into a gentle, natural drape. The result is a composition that feels precise and fluid, balancing structure with softness.

Available in single, single looped, and double looped configurations, each piece can be composed in multiple combinations to form both restrained and larger, more expansive statements.

AVAILABLE FINISHES




TECHNICAL

| | |
|---------------|---|
| MATERIAL | TREATED BRASS, GLASS |
| FINISH | ALL BRASS COMPONENTRY IS BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING. |
| LAMPING | SELV 60V (EXTERNAL DRIVER SUPPLIED) 8W, 2700K |
| | LUMEN OUTPUT BASED ON FINISH WHITE - 700LM FROSTED CLEAR - 700LM FROSTED BLACK - 500LM BLACK - 900LM |
| DIMMING | 220-240V REGION PHASE DIMMING RANGE 5 - 100% DALI DIMMING RANGE 1 - 100% |
| | 110-120V REGION PHASE DIMMING RANGE 3 - 100% DALI DIMMING RANGE 0.1 - 100% |
| | ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS. |
| | FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE. |
| LED LIFESPAN | 50,000 HRS |
| IP RATING | IP20 - FOR INDOOR USE ONLY |
| CERTIFICATION | AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN PENDING CERTIFICATION |
| CANOPY | VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE |

| | |
|----------------|---|
| DRIVER SIZE | 220 -240V PHASE L101 X W51 X H29 / L4" X W2" X H1.1" 220-240V DALI L145 X W30 X H21 / L5.7" X W1.2" / X H0.9" 110-120V PHASE *L75 X W35 X H26.5 / L3" X W1.4" X H1" 110-120V DALI *L75 X W35 X H26.5 / L3" X W1.4" X H1" |
| | *DRIVER CAN BE HOUSED WITHIN STANDARD 4" OCTAGONAL JUNCTION BOX. |
| SKU CODES | EG. SOP-C1L1.G-FCL.BR-BLK SOLACE SINGLE CHAIN - LOOPED IN FROSTED CLEAR GLASS WITH A BRUSHED BLACKENED BRASS BODY SOP-C1.G-XXX.BR-XXX SOP-C1L1.G-XXX.BR-XXX SOP-C2L1.G-XXX.BR-XXX |
| | GLASS FROSTED BLACK (G-FBL) FROSTED CLEAR (G-FCL) WHITE (G-WHT) BLACK (G-BLK) |
| | BODY BRUSHED BRASS (BR-NAT) BRUSHED BLACKENED BRASS (BR-BLK) BRUSHED BRONZED BRASS (BR-BRZ) |
| PRODUCT WEIGHT | SOP-C1 6KG / 13.2LB SOP-C1L1 6KG / 13.2LB SOP-C2L1 12KG / 26.4LB |
| PACKAGE WEIGHT | SOP-C1 7KG / 15.5LB SOP-C1L1 7KG / 15.5LB SOP-C2L1 14KG / 31LB |
| PACKAGE SIZE | SOP-C1 L 360 W 360 H 550 / L 26" W 26" H 34" SOP-C1L1 L 360 W 360 H 550 / L 26" W 26" H 34" SOP-C2L1 2X - L 360 W 360 H 550 / L 26" W 26" H 34" |


DIMENSIONS



SOP-C1
L 195 W 195 H 370
L 7.7" W 7.7" H 14.6"
MIN DROP HEIGHT - H 920 / 36.2"



SOP-C1L1*
L 195 W 195 H 370
L 7.7" W 7.7" H 14.6"
MIN DROP HEIGHT - H 920 / 36.2"

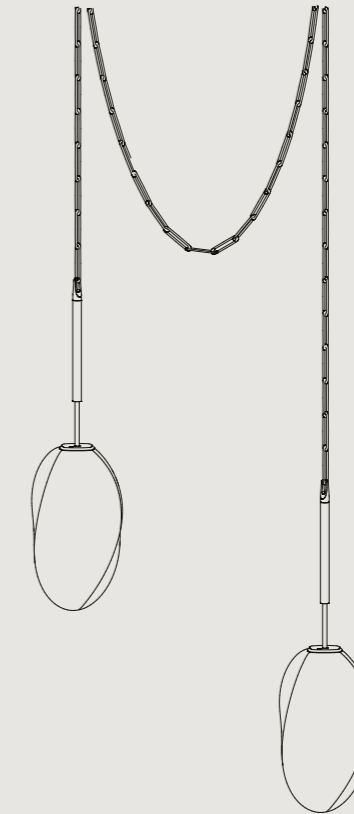

SOP-C2L1*
L 195 W 195 H 370
L 7.7" W 7.7" H 14.6"
MIN DROP HEIGHT - H 920 / 36.2"

TECHNICAL

| | |
|---------------|--|
| MATERIAL | TREATED BRASS |
| |  |
| | <p>BRUSHED BRASS</p> <p>BRUSHED BLACKENED BRASS</p> <p>BRUSHED BRONZED BRASS</p> |
| CANOPY FINISH | BRUSHED BRASS (BR-NAT) BRUSHED BLACKENED BRASS (BR-BLK) BRUSHED BRONZED BRASS (BR-BRZ) |
| SKU CODES | EG. CAN.SL.CH.BR-BLK = SLIM CHAIN CANOPY IN BRUSHED BLACKENED BRASS FINISH |

AVAILABLE CANOPIES


ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED, THE SLIM CANOPY WILL BE SUPPLIED (OR LARGE FOR US/CAN REGIONS). CANOPY FINISH TO MATCH BODY, UNLESS OTHERWISE SPECIFIED.



SLIM
CHAIN CANOPY
CAN.SL.CH.XX-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK*
CHAIN CANOPY
CAN.PK.CH.XX-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING
*US/CAN ORDERS TO BE
INSTALLED WITH SUPPLIED
JUNCTION BOX RENDER
MOUNTING PLATE



LARGE
CHAIN CANOPY
CAN.ST.170.CH.XX-XXX

Ø170 X 40MM / 6.7" X 1.6"

DRIVER HOUSED IN CANOPY

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION, TOLERANCE IS +/- 40MM

*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

* CEILING CANOPY SPACING FOR SINGLE LOOPED AND DOUBLE LOOPED PENDANTS DETERMINED BY OVERALL DROP HEIGHT. CONTACT STUDIO FOR MORE INFORMATION.