


# Chorus

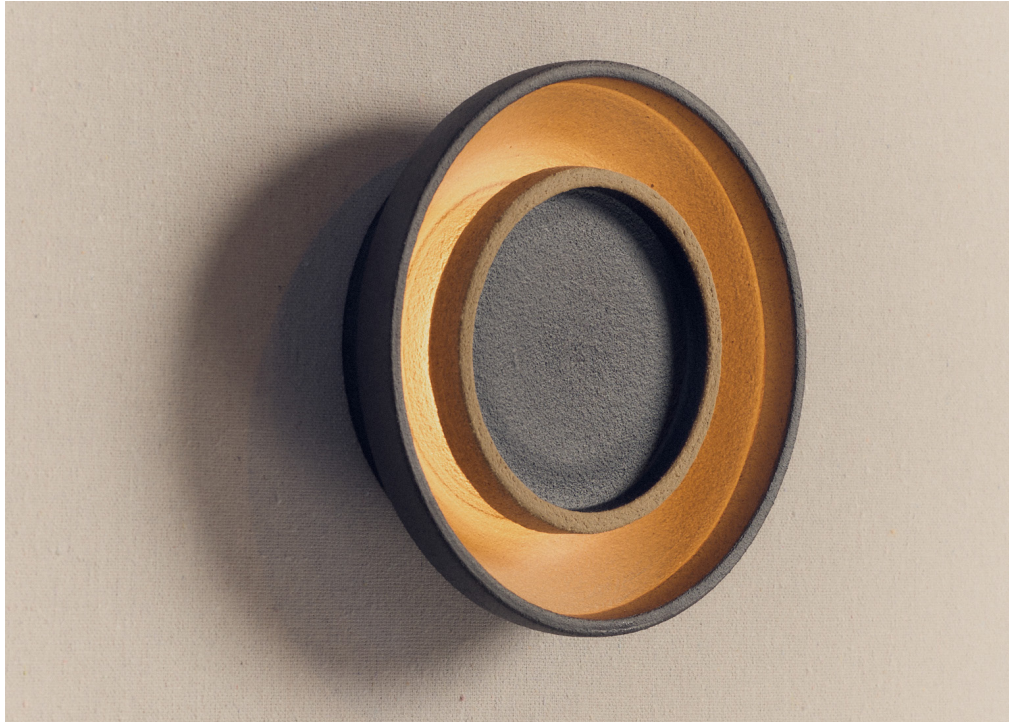

## Standard fixtures included

- 1 x Shade
- 1 x Wall mount with fixings
- LED driver to be mounted remotely.
- Driver dimensions: 55 x 10.5 x 3cm (L x W x H)

## Dimming

- Phase cut / 1-10V Dimming standard
- DALI dimming available on request

## IP rating

- IP20 for standard indoor use

## Installation

- Must be installed by a qualified electrician
- Installation diagrams provided with product or available on request

## Care and maintenance

- Wipe off dust regularly with a dry, soft cloth
- Remove any marks with a soft cloth dampened in lukewarm water with a mild detergent

## Warranty

1 year limited manufacturer's warranty  
See website for details, terms & conditions

## Leadtime

2–3 weeks (stocked items)  
\*Up to 8-10 weeks if out of stock


## Materials and finish options



Ceramic

Aluminium

Brass




## Chorus Ceramic

16cm x 16cm x 4.5cm

Approx. 1kg

6W, 2700K Fixed LED

800Lm diffused output




## Chorus Aluminium

16cm x 16cm x 4.5cm

Approx. 1kg

6W, 2700K Fixed LED

800Lm diffused output



## Chorus Brass

16cm x 16cm x 4.5cm

Approx. 2.5kg

6W, 2700K Fixed LED

800Lm diffused output